



Griffin Push-On Joint Ductile Iron Pipe

The **TYTON JOINT®** and **FASTITE JOINT®** designs incorporate a single rubber sealing gasket assuring a tight, permanent seal. The “push-on” type joint is easy to assemble and fast to install. The push-on design eliminates the need for glands and fasteners. The rubber gasket fits inside the contour of the bell socket, which seats the gasket. The plain-end (spigot) of each pipe is beveled to further ease assembly.

TYTON JOINT® Pipe 3" — 24"

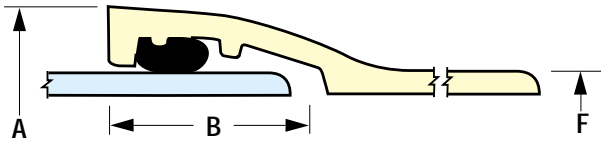

FASTITE JOINT® Pipe 30" — 48"

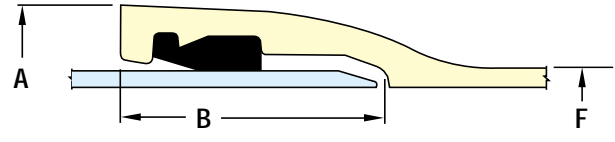

Nominal Pipe Size (inches)	"F" Pipe O.D. (inches)	"A" Pipe Bell O.D. (inches)	"B" Depth of Bell (inches)	Maximum Joint Deflection Angle (degrees)	Maximum Deflection per Joint (inches)	
					18 ft. Laying Length	20 ft. Laying Length
3	3.96	5.46	3.00	5	19	21
4	4.80	6.52	3.15	5	19	21
6	6.90	8.66	3.38	5	19	21
8	9.05	10.82	3.69	5	19	21
10	11.10	12.91	3.75	5	19	21
12	13.20	15.05	3.75	5	19	21
14	15.30	17.67	5.00	5	19	21
16	17.40	19.79	5.00	5	19	21
18	19.50	21.91	5.00	5	19	21
20	21.60	24.03	5.50	5	19	21
24	25.80	28.21	5.95	5	19	21
30	32.00	34.95	6.50	5	na	21
36	38.30	41.37	6.50	4	na	17
42	44.50	48.25	7.50	3	na	12
48	50.80	54.73	8.00	3	na	12

TYTON JOINT® is a registered trademark of U.S. Pipe and Foundry Co.
 FASTITE® is a registered trademark of American Cast Iron Pipe Co.

Pollardwater.com
 THE PROFESSIONAL'S CHOICE
www.pollardwater.com
 TOLL FREE 800-437-1146